

# Emissivity Table

| Material                             | Temp °C/°F          | Emissivity |
|--------------------------------------|---------------------|------------|
| Gold(pure highly polished)           | 227/440             | 0.02       |
| Aluminum foil                        | 27/81               | 0.04       |
| Aluminum disc                        | 27/81               | 0.18       |
| Aluminum household(flat)             | 23/73               | 0.01       |
| Aluminum (polished plate 98.3%)      | 227/400             | 0.04       |
|                                      | 577/1070            | 0.06       |
| Aluminum (rough plate)               | 26/78               | 0.06       |
| Aluminum (oxidized @599C)*           | 199/390             | 0.11       |
|                                      | 599/1110            | 0.19       |
| Aluminum surfaced roofing            | 38/100              | 0.22       |
| Tin(bright tinned iron sheet)        | 25/77               | 0.04       |
| Nickel wire                          | 187/368             | 0.1        |
| Lead(pure 99.95-unoxidized)          | 127/260             | 0.06       |
| Copper                               | 199/390             | 0.18       |
|                                      | 599/1110            | 0.19       |
| Steel                                | 199/390             | 0.52       |
|                                      | 599/1110            | 0.57       |
| Zinc galvanized sheet iron(bright)   | 28/82               | 0.23       |
| Brass(highly polished):              | 247/476             | 0.03       |
| Brass(hard rolled-polished w/lines): | 21/70               | 0.04       |
| Iron galvanized(bright)              | -                   | 0.13       |
| Iron plate(completely)               | 20/68               | 0.69       |
| Rollid sheet steel                   | 21/71               | 0.66       |
| Oxidized iron                        | 100/212             | 0.74       |
| Wrought iron                         | 21/70               | 0.94       |
| Molten iron                          | 1299-1399/3270-2550 | 0.29       |
| Copper(polished)                     | 21-117/70-242       | 0.02       |
| Copper(scraped shiny not mirrored)   | 22/72               | 0.07       |
| Copper(Plate heavily oxidized)       | 25/77               | 0.78       |
| Enamel(white fused on iron)          | 19/66               | 0.9        |
| Formica                              | 27/81               | 0.94       |
| Frozen soil                          | -                   | 0.93       |
| Brick(red-rough)                     | 21/70               | 0.93       |
| Brick(silica-unglazed rough)         | 1000/1832           | 0.8        |
| Carbon(T-carbon 0.9% ash)            | 127/260             | 0.81       |
| Concrete                             | -                   | 0.94       |
| Glass(smooth)                        | 22/72               | 0.94       |
| Granite(polished)                    | 21/70               | 0.85       |
| Ice                                  | 0/32                | 0.97       |
| Marble(light gray polished)          | 22/72               | 0.93       |
| Asbestos board                       | 23/74               | 0.96       |
| Asbestos paper                       | 38/100              | 0.93       |
|                                      | 371/700             | 0.95       |
| Asphalt(paving)                      | 4/39                | 0.97       |

State-of-the-art infrared technology

**High Performance Infrared Thermometer** with High DS, Adjustable Emissivity, Built-in Laser Sighting

# Instruction Manual

Version-01 06/MAR.

## Table Content

|   |   |
|---|---|
| <b>1. Product Introduction</b> -----            | 1 |
| 1-1 Features -----                              | 1 |
| 1-2 Applications -----                          | 1 |
| <b>2. Safety Information</b> -----              | 2 |
| 2-1 Cautions -----                              | 2 |
| 2-2 Safety symbols -----                        | 2 |
| <b>3. Specifications</b> -----                  | 3 |
| <b>4. Operation Instructions</b> -----          | 4 |
| 4-1 Quick Start -----                           | 4 |
| 4-2 Unit Diagram -----                          | 4 |
| 4-3 °C/ °F and Battery Change -----             | 5 |
| 4-4 Operation Functions -----                   | 6 |
| <b>5. Techniques of Infrared Thermometer</b> -- | 8 |
| 5-1 Field of view(FOV) ratio -----              | 8 |
| 5-2 Emissivity -----                            | 9 |
| <b>6. Maintenance</b> -----                     | 9 |

## 1. Product Introduction

Thank you for purchasing this infrared thermometer. The Infrared Thermometer is a non-contact infrared temperature measuring instrument. To measure a temperature, point the unit at the object until the temperature is read, pull the measuring trigger and hold. Make sure the target area is larger than the unit's spot size. For large target objects assure you are within target distance.

### 1-1 Features

It features with board temperature and high DS ratio. These allow user to monitor the target temperature for a long distance, far away from the potential risk.

- High DS ratio.
- Adjustable emissivity from 0.1 to 1.00 in 0.01 steps.
- Ultra low power consumption in shutdown mode.
- Extended long time measuring reliability.
- Backlit LCD display.
- °C or °F selectable.
- Electronic trigger lock.


### 1-2 Applications

- Electrical troubleshooting.
- Automotive repair and maintenance.
- Air conditioner.
- Science experiment.
- Manufacturing processes of semiconductor technology.
- Test terminals on circuits.
- Food safety and processing.
- Perform HV AC energy audits.

## 2.Safety Information

Read the following safety information carefully before attempting to operate or service the meter. Only qualified personnel should perform repairs or servicing not covered in this manual.


### Laser Warning Note!


 Do not point laser directly at eye . Use caution a round reflective surfaces. Keep out of reach of children.

### 2-1 Cautions!

- DO NOT submerge the unit in water.
- This product is not designed for use in medical evaluations. The product can only be used to measure body temperature simply for reference. They are meant for industrial and scientific purposes.

### 2-2 Safety symbols

 Dangerous, refer to this manual before using the meter.

 CE Certification.

This instrument conforms to the following standards:

**EN61326 : Electrical equipment for measurement, control and laboratory use.**

**IEC61000-4-2 : Electrostatic discharge immunity test.**

**IEC61000-4-3 : Radiated, radio-frequency, electromagnetic field immunity test.**

**IEC61000-4-8 : Power frequency magnetic field immunity test.**

Tests were conducted using a frequency range of 80-1000MHz with the instrument in three orientations. The average error for the three orientations is  $\pm 0.5^{\circ}\text{C}$  ( $\pm 1.0^{\circ}\text{F}$ ) at 3V/m throughout the spectrum. However, between 781-1000MHz at 3V/m, the instrument may not meet its stated accuracy.

## 3.Specifications


|                        |  |
|------------------------|--|
| Temperature Range      | -50~1000°C (-58~1832°F)  |
| Accuracy               | $\pm 3.0^{\circ}\text{C}$ ( $\pm 5^{\circ}\text{F}$ )<br>From -50~-20°C (-58~-4°F)<br>$\pm 2.0^{\circ}\text{C}$ ( $\pm 3^{\circ}\text{F}$ )<br>From -20~-100°C (-4~-212°F)<br>$\pm 2\%$ From<br>100~1000°C (212~-1832°F) |
| Thermopile             | 8~14 $\mu\text{m}$   |
| Repeatability          | $\pm 1^{\circ}\text{C}$ or $\pm 2^{\circ}\text{F}$   |
| Resolution             | 0.1°C  |
| Response Time          | 500 ms.  |
| Emissivity             | Adjustable 0.1~1.0   |
| Distance/Spot Ratio    | 50:1   |
| Supply Voltage         | 9V   |
| Operating Temp.        | 0~50°F (32~122°F), 10~90%RH  |
| °C/°F Switchable       | YES  |
| Auto Power Off         | Automatically after approx 30sec.  |
| Backlight              | YES  |
| Laser Sight Switchable | YES  |
| Max/Min/Avg.           | YES  |
| 10 Point Memory        | YES  |
| Audio Alarm            | YES  |
| Auto Measuring         | YES  |
| Dual Display           | YES  |
| Tripod mount           | YES  |
| USB Date Output        | YES  |
| Thermocouple K Type    | YES  |
| Dimensions             | 127 × 47 × 200mm   |
| Weight                 | 330g Approx.   |

## 4. Operations Of Instrument

### 4-1 Quick Start

To measure a temperature, point the unit at the target pull the trigger and hold. Be sure to consider the target, area inside the angle of vision of this instrument. The single spot of laser is used for aiming only.

### 4-2 Unit Diagram

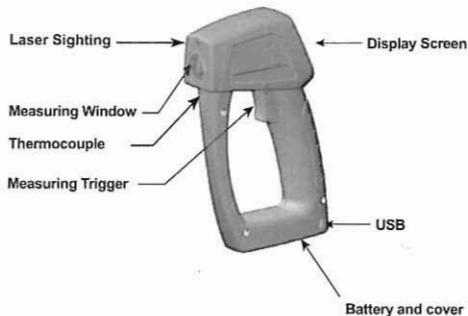


## LCD & Control Panel



### 4-3 °C/°F, Laser Switch and Battery Change

The unit is powered by a 9V battery and displays temperatures in either °C or °F. Pull the cover at the bottom of the unit and open the cover by following the step 1 and 2.


The position of switches for °C/°F, Laser Switch is shown in the following figures. To change the battery, directly replace the battery in the battery compartment.



## 4-4 Operation Functions


To operate more advance functions, it is simply by using **MODE** button to change. The sequential operations and the corresponding explanations are shown in the following flow-chart.

### Operation Mode

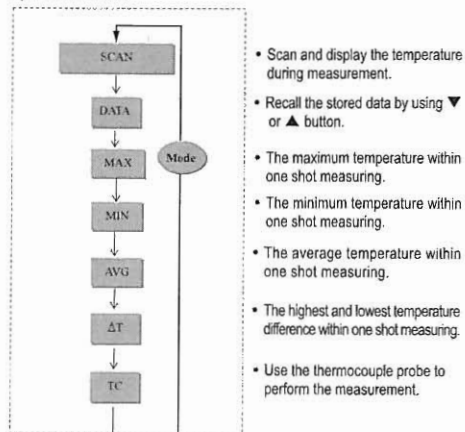

- Scan and display the temperature during measurement.
- Recall the stored data by using ▼ or ▲ button.
- The maximum temperature within one shot measuring.
- The minimum temperature within one shot measuring.
- The average temperature within one shot measuring.
- The highest and lowest temperature difference within one shot measuring.
- Use the thermocouple probe to perform the measurement.

### Parameter Setup Mode

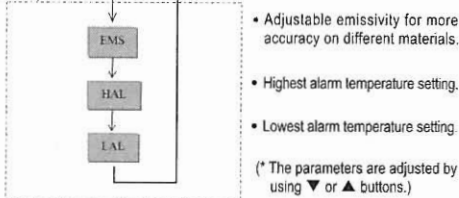

- Adjustable emissivity for more accuracy on different materials.
  - Highest alarm temperature setting.
  - Lowest alarm temperature setting.
- (\* The parameters are adjusted by using ▼ or ▲ buttons.)


## Remarks

- \* **Thermocouple:** Activate the functions just by connecting to the connector and switch to TC mode.
- \* **USB:** Simply connect to the connector and activate the application program by clicking the "Infrared Thermometer" icon. Please note that AP should be installed from **CD-ROM** before the connection.
- \* **Memory:** Activate the record function by push the **M** button. To delete all the records, press up or down button to **DATA0** and press "**M**" button.
- \* **LOCK:** Push the  button to continuously measure and display the temperature without pull the measuring trigger.
- \* The above functions can be activated always in any step of operations mode in flow-chart.
- \* In **SCAN** mode, the LCD displays both the current temperature in Celsius or Fahrenheit. The unit will **HOLD** the last reading for 30 seconds after the trigger is released. When the battery is low, the battery icon is display, but the unit will continue to function.
- \* While **DATA#** flashes on the left bottom, the value on the Main Temperature Display can be recorded in "**#**" log. Simply press "**M**" button.

## 5. Techniques Of Infrared Thermometer

### 5-1 Field of View (FOV) ratio =Distance to Diameter (DS) ratio

The field of view is the angle of vision at which the instrument operates, and is determined by the optics of the unit. The FOV is the ratio of the distance from the target to the target diameter. The smaller the target, the closer you should be to it. When the target diameter is small, it is important to bring the thermometer closer to the target to insure that only the target is measured, excluding the surroundings.

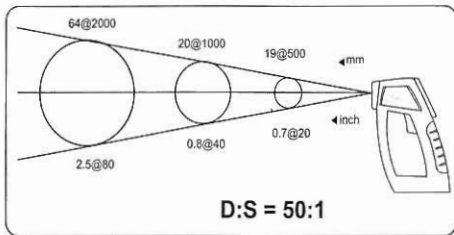

### 5-2 Emissivity

Emissivity is the ability of an object to emit or absorb energy. Perfect emitters have an emissivity of 1, emitting 100% of incident energy. An object with an emissivity of 0.8 will absorb 80% and reflect 20% of the incident energy. Emissivity is defined as ratio of the energy radiated by an object at given temperature to the energy emitted by a perfect radiator at the same temperature. All values of emissivity fall between 0.0 and 1.0.

Non-contact temperature sensors measure IR energy emitted by the target, have fast response, and are commonly used to measure moving and intermittent targets, targets in a vacuum, and targets that inaccessible due to hostile environments, geometry limitations, or safety hazard. The cost is relatively high, although in some cases is comparable to contact devices.

## 6. Maintenance

Cleaning the lens: Blow off loose particles using clean compressed air. Gently brush remaining debris away with a camel's hair brush. Carefully wipe the surface with a moist cotton swab. The swab may be moistened with water.

### NOTE:

DO NOT use solvents to clean the lens.

### Cleaning the housing:

Use soap and water on a damp sponge or soft cloth.